


Woven Fiberglass Gasket / Thermal Insulating Tape: *Premium Grade* 1200°F / 648°C: DeltaGlass™ Very High Temperature & Heat Resistant Plain & Drop-Warp (Bolt-Hole / Ladder Tape™)

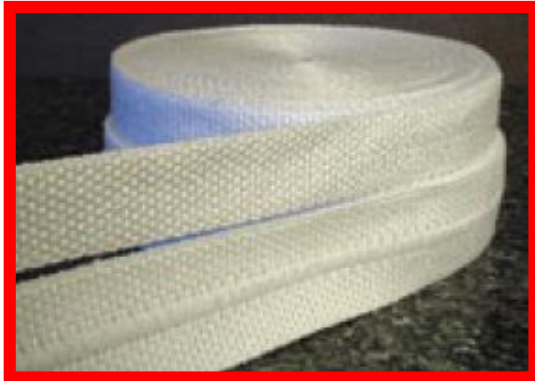

Manufactured of texturized fiberglass yarns, this tape will withstand temperatures up to 1200°F / 648°C in continuous service. 100% asbestos free, this tape is a bright white color.

This tape offers superior insulating properties as well as low chloride content.

Offered in *Plain* and *Drop Warp* (also known as *Bolt-Hole* or *LadderTape™*). Drop Warp tape has lengthwise yarns missing from the center of the tape to allow fasteners to pass through the tape for assembly onto access doors, etc.

A Heat Treated version of this product is available – please enquire. Also available with Pressure Sensitive Adhesive (PSA) (see following page).

1200°F / 648°C continuous rating, high insulation value & excellent personnel protection

Very High Temperature & Heat Resistant Fiberglass Woven Plain & Drop-Warp (Bolt-Hole / LadderTape™) - Premium Grade					
Part Number	Width in / mm		Price per Roll By Thickness		
			"A" thickness Price / Weight (lb)	"B" thickness Price / Weight (lb)	"C" thickness Price / Weight (lb)
T-FG-WOVEN-P-M013-08-X-Z**	.5	13	\$ 34.20 / 1.0	\$ 44.43 / 2.2	NA
T-FG-WOVEN-P-M019-12-X-Z**	.75	19	\$ 49.60 / 1.6	\$ 55.70 / 3.2	\$ 88.87 / 6.9
T-FG-WOVEN-P-M025-16-X-Z	1.0	25	\$ 36.73 / 2.1	\$ 58.44 / 4.2	\$ 128.26 / 9.8
T-FG-WOVEN-P-M032-20-X-Z	1.25	32	\$ 38.73 / 2.5	\$ 59.73 / 5.2	\$ 146.83 / 12.6
T-FG-WOVEN-P-M038-24-X-Z	1.5	38	\$ 40.13 / 3.0	\$ 60.55 / 6.2	\$ 174.43 / 14.6
T-FG-WOVEN-P-M051-32-X-Z	2.0	51	\$ 44.73 / 4.1	\$ 70.80 / 8.2	\$ 188.71 / 19.5
T-FG-WOVEN-P-M064-40-X-Z	2.5	64	\$ 49.86 / 5.1	\$ 82.20 / 10.2	\$ 214.66 / 24.4
T-FG-WOVEN-P-M076-48-X-Z	3.0	76	\$ 58.23 / 6.2	\$ 99.20 / 12.2	\$ 244.70 / 29.3
T-FG-WOVEN-P-M089-56-X-Z	3.5	89	\$ 66.43 / 7.3	\$ 110.86 / 14.2	\$ 286.43 / 34.2
T-FG-WOVEN-P-M102-64-X-Z	4.0	102	\$ 75.60 / 8.2	\$ 123.16 / 16.5	\$ 303.16 / 39.0
T-FG-WOVEN-P-M114-72-X-Z	4.5	114	\$ 90.77 / 9.2	\$ 163.21 / 18.5	\$ 348.44 / 44.0
T-FG-WOVEN-P-M127-80-X-Z	5.0	127	\$ 92.73 / 10.3	\$ 169.93 / 20.5	\$ 379.46 / 48.8
T-FG-WOVEN-P-M140-88-X-Z	5.5	140	\$ 96.73 / 11.3	\$ 177.93 / 22.5	\$ 398.46 / 53.7
T-FG-WOVEN-P-M152-96-X-Z	6.0	152	\$ 117.03 / 12.3	\$ 187.46 / 24.5	\$ 423.10 / 58.6

- For the "X" Value, specify A, B or C in part number to correspond to the desired thickness
A = 1/16" / .0625" / 1.59mm **B** = 1/8" / .125" / 3.18mm **C** = 1/4" / .250" / 6.35mm
- For the "Z" value in part number: use "-P" for Plain style tape or "-DW" for Drop Warp style tape. Same price either version.
- All tapes are 100 foot / 30 metre lengths.
- Items with * may have higher minimum order quantities – please call.
- ** -08 / .5" / 13mm and -12 / .75" / 19mm width tapes are not available in Drop Warp
- Heat Treated / Heat Cleaned Available: low smoke – dimensionally set – exceptionally clean

Custom width tapes: Minimum 20 rolls or \$650 setup charge for lower quantities.

Woven Fiberglass Gasket/Thermal Insulating Tape: *Premium Grade with PSA Adhesive*

1200°F / 648°C: DeltaGlass™ Very High Temperature & Heat Resistant Plain & Drop Warp (Bolt-Hole / Ladder Tape™) with Adhesive PSA



Manufactured of texturized fiberglass yarns, this tape will withstand temperatures up to 1200°F / 648°C in continuous service. 100% asbestos free, this tape is a bright white color.

This tape offers superior insulating properties as well as low chloride content.

Offered in *Plain* and *Drop Warp* (also known as *Bolt-Hole* or *LadderTape™*). Drop Warp tape has lengthwise yarns missing from the center of the tape to allow fasteners to pass through the tape for assembly onto access doors, etc.

A Heat Treated version of this product is available – please enquire. Also available without Pressure Sensitive Adhesive (PSA) (see previous page in catalog).

1200°F / 648°C continuous rating, high insulation value & excellent personnel protection

Very High Temperature & Heat Resistant Fiberglass Woven Plain & Drop-Warp / Bolt-Hole / LadderTape™ - Premium Grade with PSA Adhesive

Part Number	Width in / mm		Price per Roll By Thickness		
			"A" thickness Price	"B" thickness Price	"C" thickness Price
T-FG-WOVEN-P-M013-08-X-Z-PSA**	.5	13	\$ 77.17	\$ 87.40	NA
T-FG-WOVEN-P-M019-12-X-Z-PSA**	.75	19	\$ 83.63	\$ 92.60	\$ 137.03
T-FG-WOVEN-P-M025-16-X-Z-PSA	1.0	25	\$ 87.03	\$ 100.23	\$ 178.23
T-FG-WOVEN-P-M032-20-X-Z-PSA	1.25	32	\$ 97.88	\$ 117.03	\$ 193.50
T-FG-WOVEN-P-M038-24-X-Z-PSA	1.5	38	\$ 100.13	\$ 119.87	\$ 227.77
T-FG-WOVEN-P-M051-32-X-Z-PSA	2.0	51	\$ 111.50	\$ 137.27	\$ 252.83
T-FG-WOVEN-P-M064-40-X-Z-PSA	2.5	64	\$ 124.87	\$ 157.20	\$ 289.43
T-FG-WOVEN-P-M076-48-X-Z-PSA	3.0	76	\$ 139.46	\$ 180.70	\$ 326.36
T-FG-WOVEN-P-M089-56-X-Z-PSA	3.5	89	\$ 146.40	\$ 193.86	\$ 396.96
T-FG-WOVEN-P-M102-64-X-Z-PSA	4.0	102	\$ 185.46	\$ 216.00	\$ 396.73
T-FG-WOVEN-P-M114-72-X-Z-PSA	4.5	114	\$ 191.43	\$ 247.63	\$ 437.71
T-FG-WOVEN-P-M127-80-X-Z-PSA	5.0	127	\$ 212.33	\$ 281.20	\$ 491.40
T-FG-WOVEN-P-M140-88-X-Z-PSA	5.5	140	\$ 219.33	\$ 288.20	\$ 501.40
T-FG-WOVEN-P-M152-96-X-Z-PSA	6.0	152	\$ 227.36	\$ 295.23	\$ 518.20

- For the "X" Value, specify A, B or C in part number to correspond to the desired thickness
A = 1/16" / .0625" / 1.59mm B = 1/8" / .125" / 3.18mm C = 1/4" / .250" / 6.35mm
- For the "Z" value in part number: use "-P" for Plain style tape or "-DW" for Drop Warp style tape. Same price either version.
- All tapes are 100 foot / 30 metre lengths.
- Items with * may have higher minimum order quantities – please call.
- ** -08 / .5" / 13mm and -12 / .75" / 19mm width tapes are not available in Drop Warp
- Heat Treated / Heat Cleaned Available: low smoke – dimensionally set – exceptionally clean

Custom width tapes: Minimum 20 rolls or \$650 setup charge for lower quantities.

Woven Fiberglass Tape: Premium Grade
1200°F / 648°C: DeltaGlass™ Very High Temperature & Heat Resistant Plain Tape – EXTRA THICK



Manufactured of texturized fiberglass yarns, this tape will withstand temperatures up to 1200°F / 648°C in continuous service. 100% asbestos free, this tape is a bright white color.

This tape offers superior insulating properties as well as low chloride content.

This is the thickest woven fiberglass tape available at 9/32" – 0.280" – 7.2mm thick.

A Heat Treated version of this product is available – please enquire.

1200°F / 648°C continuous rating, high insulation value & excellent personnel protection

Very High Temperature & Heat Resistant Fiberglass Woven Plain Tape – EXTRA THICK - Premium Grade			
Part Number	Width in / mm		Price / Weight (lb) per roll
T-FG-W-XTP-M025-16	1.0	25	\$ 241.08 / 11.3
T-FG-W-XTP-M038-24	1.5	38	\$ 320.67 / 16.8
T-FG-W-XTP-M051-32	2.0	51	\$ 425.88 / 22.5
T-FG-W-XTP-M064-40	2.5	64	\$ 498.86 / 28.1
T-FG-W-XTP-M076-48	3.0	76	\$ 621.48 / 33.7
T-FG-W-XTP-M089-56	3.5	89	\$ 678.53 / 39.4
T-FG-W-XTP-M102-64	4.0	102	\$ 770.96 / 45.1
T-FG-W-XTP-M127-80	5.0	127	\$ 1025.13 / 56.3
T-FG-W-XTP-M152-96	6.0	152	\$ 1212.63 / 67.5
T-FG-W-XTP-M254-160	10.0	254	\$ 1956.76 / 107
T-FG-W-XTP-M305-192	12.0	305	\$ 2338.00 / 135

- All tapes are 100 foot / 30 metre lengths.
- Available with CofC to MIL-I-24244C (Amend 1, IC 1, Type XVIII)
- Test Report is available at \$1565.00 per batch
- Minimum 6 rolls for 6", 10" and 12" widths, but check if we may have smaller minimum quantity available.

Custom width tapes: Minimum 20 rolls or \$650 setup charge for lower quantities.

Woven Fiberglass Tape: Premium Grade
1200°F / 648°C: DeltaGlass™ Very High Temperature & Heat Resistant Plain Tape:
EXTRA WIDE



Manufactured of texturized fiberglass yarns, this tape will withstand temperatures up to 1100°F / 593°C in continuous service. 100% asbestos free, this tape is a bright white color.

This tape offers superior insulating properties as well as low chloride content.

Premium grade tape has a higher bulk than Industrial grade (the same size tape weighs more in Premium grade than Industrial grade as it has more fiberglass content).

A Heat Treated version of this product is available – please enquire

1200°F / 648°C continuous rating, high insulation value & excellent personnel protection

Very High Temperature & Heat Resistant Fiberglass Woven Plain Tape: EXTRA WIDE - Premium Grade					
Part Number	Width in / mm		Price per Roll By Thickness		
			"A" thickness Price / Weight (lb)	"B" thickness Price / Weight (lb)	"C" thickness Price / Weight (lb)
T-FG-W-EWP-M178-112-X	7	178	\$ 257.60 / 14.4	\$ 526.31 / 28.7	\$ 1108.82 / 68.4
T-FG-W-EWP-M203-128-X	8	203	\$ 296.47 / 16.4	\$ 620.62 / 32.7	\$ 1266.97 / 78.2
T-FG-W-EWP-M228-144-X	9	228	\$ 315.54 / 18.5	\$ 658.91 / 36.9	\$ 1342.36 / 88.0
T-FG-W-EWP-M254-160-X	10	254	\$ 352.45 / 20.6	\$ 735.51 / 41.1	\$ 1492.56 / 97.8
T-FG-W-EWP-M279-176-X	11	279	\$ 389.25 / 22.7	\$ 812.16 / 45.3	\$ 1642.74 / 107.6
T-FG-W-EWP-M305-192-X	12	305	\$ 429.05 / 24.8	\$ 894.93 / 50.0	\$ 1792.88 / 117.4

- Minimum order is 6 rolls
- For the "X" Value, specify A, B or C in part number to correspond to the desired thickness
A = 1/16" / .0625" / 1.59mm B = 1/8" / .125" / 3.18mm C = 1/4" / .250" / 6.35mm
- All tapes are 100 foot / 30 metre lengths.

Custom width tapes: Minimum 20 rolls or \$650 setup charge for lower quantities.

Fiberglass Woven Gasket & Thermal Insulating Tape: *Industrial Grade* 1200°F / 648°C: - Very High Temperature & Heat Resistant Plain & Drop-Warp (Bolt-Hole / Ladder Tape)



Manufactured of texturized fiberglass yarns, tape will withstand temperatures up to 1200°F / 648°C in continuous service.

This tape offers superior insulating properties as well as low chloride content.

Offered in *Plain* and *Drop Warp* (also known as *Bolt-Hole* or *LadderTape™*). Drop Warp tape has lengthwise yarns missing from the center of the tape to allow fasteners to pass through the tape for assembly onto access doors, etc. This is also called a Ladder or Bolthole tape.

A Heat Treated version of this product is available.

Industrial grade tape has a lower bulk than Premium grade (the same size tape weighs more in Premium grade than Industrial grade as it has more fiberglass content). Available with and without Pressure Sensitive Adhesive (PSA).

1200°F / 648°C continuous rating, high insulation value & excellent personnel protection

Very High Temperature & Heat Resistant Fiberglass Woven Plain & Bolt-Hole / Drop-Warp / LadderTape™ - Industrial Grade					
Part Number	Width in / mm		Price per Roll By Thickness: A / B / C		
			"A" thickness no PSA / with PSA	"B" thickness no PSA / with PSA	"C" thickness no PSA / with PSA
T-FG-WOVEN-I-M013-08-X-Z**	.5	13	\$ 102.63 / \$ 218.13	\$ 37.30 / \$ 80.26	N/A / NA
T-FG-WOVEN-I-M019-12-X-Z**	.75	19	\$ 20.46 / \$ 69.40	\$ 38.74 / \$ 86.22	N/A / NA
T-FG-WOVEN-I-M025-16-X-Z	1.0	25	\$ 23.90 / \$ 74.16	\$ 38.56 / \$ 88.43	\$ 57.35 / N/A
T-FG-WOVEN-I-M032-20-X-Z	1.25	32	\$ 29.63 / \$ 88.53	\$ 43.80 / \$ 99.20	N/A / NA
T-FG-WOVEN-I-M038-24-X-Z	1.5	38	\$ 29.86 / \$ 89.46	\$ 45.48 / \$ 108.06	N/A / NA
T-FG-WOVEN-I-M051-32-X-Z	2.0	51	\$ 34.43 / \$ 101.76	\$ 50.50 / \$ 117.83	\$ 67.21 / N/A
T-FG-WOVEN-I-M064-40-X-Z	2.5	64	\$ 48.63 / \$ 123.16	\$ 65.80 / \$ 140.96	N/A / NA
T-FG-WOVEN-I-M076-48-X-Z	3.0	76	\$ 53.03 / \$ 135.23	\$ 67.10 / \$ 147.50	\$ 84.81 / N/A
T-FG-WOVEN-I-M089-56-X-Z	3.5	89	\$ 59.66 / \$ 141.13	\$ 78.66 / \$ 156.13	N/A / NA
T-FG-WOVEN-I-M102-64-X-Z	4.0	102	\$ 63.16 / \$ 157.93	\$ 87.76 / \$ 168.53	N/A / NA
T-FG-WOVEN-I-M114-72-X-Z	4.5	114	\$ 71.46 / \$ 169.93	\$ 94.51 / \$ 188.79	N/A / NA
T-FG-WOVEN-I-M127-80-X-Z	5.0	127	\$ 79.53 / \$ 191.70	\$ 109.80 / \$ 203.96	N/A / NA
T-FG-WOVEN-I-M140-88-X-Z	5.5	140	\$ 92.17 / \$ 201.33	\$ 120.27 / \$ 217.31	N/A / NA
T-FG-WOVEN-I-M152-96-X-Z	6.0	152	\$ 108.73 / \$ 213.00	\$ 126.36 / \$ 229.63	N/A / NA

- For the "X" value, specify "A" or "B" in part number to correspond to the desired thickness
A = 1/16" / .0625" / 1.59mm **B** = 1/8" / .125" / 3.18mm **C** = 1/4" / .250" / 6.35mm
- For "Z" value in part number: use "-P" for Plain style tape or "-DW" for Drop Warp style tape
 Same price either version. Not all sizes available in drop warp style.
- All tapes are 100 foot / 30 metre lengths.
- Items with * may have higher minimum order quantities – please call.
- ** .5"/13mm and .75"/19mm width tapes are not available in Drop Warp

Fiberglass Woven Gasket & Thermal Insulating Tape: *Heat Treated – Heat Cleaned*

1200°F / 648°C: Very High Temperature & Heat Resistant Plain Tape



Manufactured of texturized fiberglass yarns, tape will withstand temperatures up to 1200°F / 648°C in continuous service.

This tape offers superior insulating properties as well as low chloride content.

Heat Treated / Heat Cleaned tapes have very low smoke off when installed in high temperature applications, as the organics have been already mostly removed. Heat treating also sets the tape dimensionally.

1200°F / 648°C continuous rating, high insulation value & excellent personnel protection

Very High Temperature & Heat Resistant Fiberglass Woven Plain Tape: Heat Treated / Heat Cleaned			
Part Number	Width in / mm		Price per Roll
T-FG-WOVEN-HT-M025-16	1.0	25	\$ 48.56
T-FG-WOVEN-HT-M051-32	2.0	51	\$ 62.50
T-FG-WOVEN-HT-M064-40	2.5	64	\$ 79.80
T-FG-WOVEN-HT-M076-48	3.0	76	\$ 81.10
T-FG-WOVEN-HT-M102-64	4.0	102	\$ 107.76


These are common ordered sizes: any of our tapes can be heat-treated/heat cleaned

- Tape thickness is .100"
- All tapes are 100 foot / 30 metre lengths.

Fiberglass Woven Gasket & Thermal Insulating Tape:

Premium Grade / Special Thin

1200°F / 648°C: Very High Temperature & Heat Resistant Plain & Bolt-Hole / LadderTape™

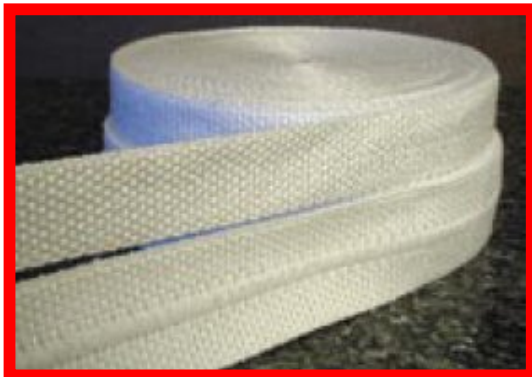

Manufactured of texturized fiberglass yarns, this tape will withstand temperatures up to 1200°F / 648°C in continuous service.

This tape offers superior insulating properties as well as low chloride content.

Offered in *Plain* and *Drop Warp* (also known as *Bolt-Hole* or *LadderTape™*). Drop Warp tape has lengthwise yarns missing from the center of the tape to allow fasteners to pass through the tape for assembly onto access doors, etc.

A Heat Treated version of this product is available – please enquire

1200°F / 648°C continuous rating, high insulation value & excellent personnel protection

Very High Temperature & Heat Resistant Fiberglass Woven Plain & Bolt-Hole / Drop-Warp / LadderTape™ Premium Grade / Special Thin 1/32" / .0313" / 0.8mm Thickness				
Part Number	Width in / mm		Price per Roll	
			no PSA	with PSA
T-FG-WOVEN-P-THIN-M013-08-X**	.5	13	\$ 16.88	\$ 27.43
T-FG-WOVEN-P-THIN-M025-16-X	1.0	25	\$ 24.20	\$ 37.23
T-FG-WOVEN-P-THIN-M038-24-X	1.5	38	\$ 31.40	\$ 54.13
T-FG-WOVEN-P-THIN-M051-32-X	2.0	51	\$ 37.73	\$ 65.33
T-FG-WOVEN-P-THIN-M064-40-X	2.5	64	\$ 45.10	\$ 85.90
T-FG-WOVEN-P-THIN-M076-48-X	3.0	76	\$ 52.53	\$ 106.37
T-FG-WOVEN-P-THIN-M089-56-X	3.5	89	\$ 60.47	\$ 120.86
T-FG-WOVEN-P-THIN-M102-64-X	4.0	102	\$ 67.80	\$ 135.40
T-FG-WOVEN-P-THIN-M114-72-X	4.5	114	\$ 75.63	\$ 149.30
T-FG-WOVEN-P-THIN-M127-80-X	5.0	127	\$ 82.73	\$ 163.13
T-FG-WOVEN-P-THIN-M140-88-X	5.5	140	\$ 89.96	\$ 176.47
T-FG-WOVEN-P-THIN-M152-96-X	6.0	152	\$ 96.90	\$ 189.80

- This tape is 1/32" / .0313" / 0.8mm thick
- For the "X" value in part number: use "-P" for Plain style tape
or "-DW" for Drop Warp style tape.

Same price either style.

- Add "-PSA" to the part number for tape with PSA coating.
- All tapes are 100 foot / 30 metre lengths.
- ** -08 / .5" / 13mm width tapes are not available in Drop Warp

Fiberglass Colored Woven Tape:
1200°F / 648°C: Very High Temperature & Heat Resistant: Industrial Grade



Manufactured of texturized fiberglass yarns, tape will withstand temperatures up to 1200°F / 648°C in continuous service.

tape offers superior insulating properties as well as low chloride content.

Color coded tapes are an excellent solution for identifying hoses and pipes, for example, as supply (hotter) or return (cooler).

Available in Black, Blue, Red, Green, Silver

Only available in 1/16" thick.

1200°F / 648°C continuous rating, high insulation value & excellent personnel protection

Very High Temperature & Heat Resistant Fiberglass Woven Color Coded Tape			
Part Number	Width in / mm		Price per Roll By Length
			15 feet / 25 feet / 50 feet
T-FG-CC-M025-16-A-X-Y	1.0	25	\$ 12.41 / \$ 18.60 / \$ 34.87
T-FG-CC-M051-32-A-X-Y	2.0	51	\$ 21.89 / \$ 33.64 / \$ 63.62

- For the "X" value, specify "BK" for black; "BL" for blue; "R" for red; "G" for green; "S" for silver/grey.
- For the "Y" value, add the length to the part number; -15, -25, -50

MINIMUM ORDER 200 ROLLS